
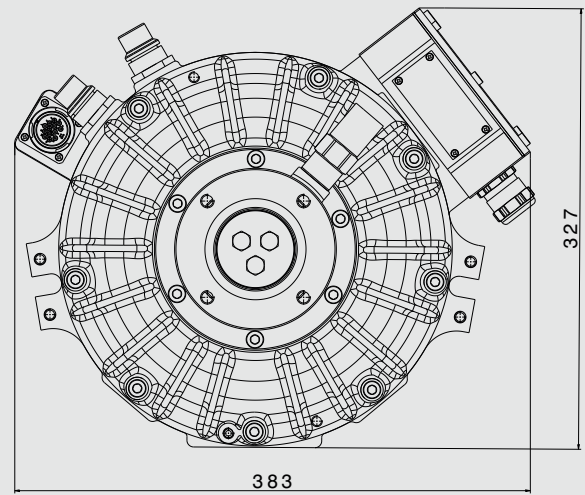


# TMPW 25A-26-8

Permanent Magnet Synchronous Motor for Light Duty Applications

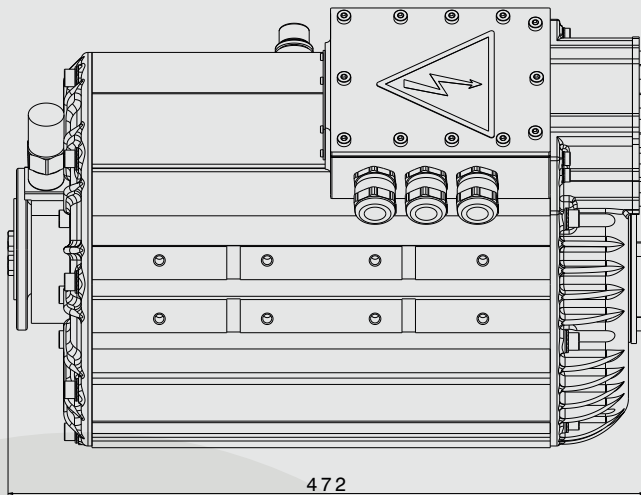

## Technical Data

Motor	LD.T3
DC link voltage	484 – 750 V
Max. speed	4800 rpm
Power (peak 30 s   continuous 30 min)	217   94 kW
Torque (peak 30 s   continuous 30 min)	1200   500 Nm

Total weight	125 kg
Protection class	IP6K9K
Cooling system	Liquid-cooled

**Available with 3, 6 or 12 HV connections and various winding designs.**

## Looking for an electric drive system?

This motor can be delivered as part of a complete electric drive solution thanks to strategic partnerships.

## Your advantages at a glance

- \* noise-optimized system
- \* high-end-insulation system
- \* made in Europe
- \* can meet Buy America requirements
- \* longlife bearing concept
- \* high power density
- \* operation with various inverter types possible
- \* Long-Life Value Service

**Contact us!**  
**Headquarters Austria**  
✉ road@tsa.at  
www.tsa.at/road



**Traktionssysteme Austria GmbH**  
Brown-Boveri-Str. 1  
2351 Wiener Neudorf  
Austria

